

## Sprinkler Identification Signs

Manufactured of aluminum, painted white then printed with "fade resistant" red ink. Each sign is drilled for easy installation and is plastic coated to prevent scratching of finish during shipment and final installation.

Designed in accordance with NFPA.

Model	Description	Model	Description
900-00994	Air Line, 6" x 2"	900-00900	Hydraulic Systems, 5" x 7"
900-00920	Alarm Test, 6" x 2"	900-00980	Main Control, 6" x 2"
900-00940	Anti-freeze System, 6" x 2"	900-00880	Main Drain, 6" x 2"
900-00830	Auxiliary Drain, 6" x 2"	900-00840	Sprinkler Valve Room, 6" x 2"
900-00960	Control Valve, 6" x 2"	900-00990	Test Valve, 6" x 2"
900-00950	Control Valve, 9" x 7"	900-00970	Water Motorline, 6" x 2"
900-00930	Fire Alarm Bell, 9" x 7"	900-00890	Valve Shut
900-00910	Inspectors Test, 6" x 2"		



## Spare Sprinkler Head Boxes

All cabinets come with "knockouts" to accommodate 3/4" IPS sprinklers. Finished in red enamel.

Model	Description
HB12	12 Spare Head
HB6	6 Spare Head



## Rectorseal Fire Stop

Metacaulk 1000® is a water based, flexible, highly intumescent sealant designed for use on metal, insulated, fiberglass and plastic pipes. It can also be used for top of the wall construction joints, power and telephone cables.

- Meets ASTM E 814, UL 1479 and UL 2079 standards
- Remains flexible
- Non-sagging, non-toxic, no VOC's
- Will not re-emulsify after cure
- Paintable
- Available in cartridges and pails
- UL Classified up to 3 hours

Volume coverage:

10.3 oz. tube(304 ml): 18 cu. in. (295 cc)

5 gallon (18.9 liter): 1155 cu. in. (5000 cu. cm/L)

VOC: Negligible

ASTM 84, UL 723 Tunnel Test

**RECTORSEAL**



Model	Size
900-03450	10.3 oz
900-03460	5 gal.

## Gloves

Model	Description
900-00530	Brown Leather Jersey
900-00540	Leather Palm Safety Cuff
900-00550	PVC Dotted Knit





## Lip Stick Paint Markers

Suitable for use on steel and plastic pipe as well as other nonporous materials. These markers feature a "pump" style tip for continuous flow of paint to the tip. Marks through grease, oil and other contaminants.

Model	Description
900-03420	Yellow
03-175	White
6000-07860	Yellow Dijon Keil Crayon



## Anti-Freeze The Original Non-Toxic Anti-Freeze

No-Freeze, the most trusted name in non-toxic anti-freeze. A chemically balanced solution engineered to give worry free protection. Provides expansion point protection to -100°F. System will flow to -61°F.

Model	Description
900-3250	5 Gal. Pail
900-3260	55 Gal. Drum

## Fire Safe Anti-Freeze Glycerine Based CPVC Safe

Fire Safe anti-freeze protection fluid is glycerin based which is in compliance with the recommendations of NFPA 13. Systems using Fire Safe are assured flow protection of -15°F and burst protection of -50°F. It is ready to use and should not be diluted.

Model	Description
900-3246	5 Gal. Pail
900-3247	55 Gal. Drum



## LIP Taped Teflon® Pipe Thread Sealing Tape

Made from pure virgin Teflon® and manufactured to MIL SPEC T27730A.

Model	Description
900-03220	Pipe Tape 1/2" x 520"
900-03230	Pipe Tape 3/4" x 520"
900-03240	Pipe Tape 1" x 520"

\*Registered trademark of E.I. Dupont

## LIP Seal Thread Sealant Paste w/Teflon®

Formulated as a low cost, high performance thread sealant. LIP Seal contains more Teflon\* by volume than any other similar product. Suitable for most threaded materials including CPVC.

Model	Description
900-03430	1-Qt. Flat Top Can


\*Registered trademark of E.I. Dupont



## LIP Lube Mechanical Coupling Grease

Specifically designed for mechanical couplings. This lubricant will not dry out or freeze in normal applications.

Model	Description
900-03680	1-Qt. (approx. 2 lbs.)

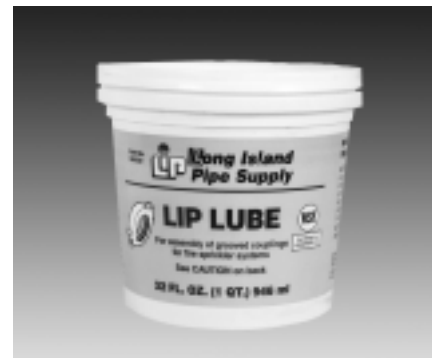

## Wood Handle Dope Brush

6" wood handle with natural fiber bristles. For use with pipe dope and mechanical coupling grease.

Model	Description
900-03600	Dope Brush



## Weld Sealant-Permabond® HL126

HL126 anaerobic sealant prevents porosity leaks in sprinkler system fabrication and repairs porosity leaks in the field.

- Eliminates repair costs due to call-backs
- Easy to use
- Prevents leaks in fabrication
- Seals leaks in the field

HL126 sealant cures to a permanent plastic seal that fills the imperfections in the welded surface. The curing process is initiated by the presence of metal (weld) and the absence of air, and occurs once the sealant wicks into the porosity leak or pinhole.

Model	Description
HL126	250 ml.





## Liplock® Pipe Dope

### Anaerobic Pipe Sealant with Lubricants

Liplock sealant uses anaerobic technology to prevent leaks in sprinkler system fabrication and improves installation in the field. Unlike traditional pipe dope, Liplock sealant cures to a plastic seal initiated by the presence of metal and the absence of air.

- 100% leak-free seal.
- Eliminates repair costs due to call-backs.
- Available in 750ml containers.
- Seals cut and mis-threaded fittings.
- Will not dry out when container is left open.
- Will not thin in summer or thicken in winter.
- Replaces pipe dope and sealing tapes.
- UL Listed.

Model	Description
900-03395	750 ml

## Permabond

### Anaerobic Pipe Sealant with Teflon®

Permabond sealant uses anaerobic technology to prevent leaks in sprinkler system fabrication and improves installation in the field. Unlike traditional pipe dope, Permabond sealant cures to a plastic seal initiated by the presence of metal and the absence of air.

- Used by Long Island Pipe Supply for all fabricated jobs to assure a leak-free seal.
- Eliminates repair costs due to call-backs.
- Available in 750ml containers.
- Seals cut and mis-threaded fittings.
- Will not dry out when container is left open.
- Will not thin in summer or thicken in winter.
- No need for sealing tapes.
- UL Listed.

Model	Description
900-3410	750 ml.
900-03460	5 gal

\* Registered trademark of E.I. DuPont



## Premium Cutting Oil

Dark Cutting Oil reduces friction and acts as an effective coolant and anti-weld agent during hand thread cutting operations and when using low rpm machines.

- Special additive provides increased lubricity for longer die life.
- Will cut smoother, sharper, unbroken threads.

Model	Description
900-03490	Dark Cutting Oil, 1 gal
900-03270	Cutting Oil, 55 gal